

03/09/00

+

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

862.C1858

First Named Inventor or Application Identifier

KEN-ICHI OHTA, ET AL.

Express Mail Label No.

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 202311. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)2. ☒ Specification Total Pages 623. ☒ Drawing(s) (35 USC 113) Total Sheets 274. ☒ Oath or Declaration Total Pages 2a. ☒ Newly executed (original or copy)b. ☐ Unexecuted for information purposesc. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
(Note Box 5 below)i. ☐ **DELETION OF INVENTOR(S)**Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).5. ☐ Incorporation By Reference (useable if Box 4c is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 4c, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☐ Information Disclosure  
Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations12. ☐ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)14. ☐ Small Entity  
Statement(s) ☐ Statement filed in prior application  
Status still proper and desired15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)16. ☐ Other: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation
 ☐ Divisional
 ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

| CLAIMS | (1) FOR  | (2) NUMBER FILED | (3) NUMBER EXTRA | (4) RATE                      | (5) CALCULATIONS |
|--------|--|------------------|------------------|-------------------------------|------------------|
|        | TOTAL CLAIMS<br>(37 CFR 1.16(c))   | 37-20 =          | 17               | X \$ 18.00 =                  | \$306.00         |
|        | INDEPENDENT<br>CLAIMS (37 cfr 1.16(b))                                     | 9-3 =            | 6                | X \$ 78.00 =                  | \$468.00         |
|        | MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))                 |                  |                  | \$260.00 =                    | \$0              |
|        |  |                  |                  | BASIC FEE<br>(37 CFR 1.16(a)) | \$690.00         |
|        | Total of above Calculations =  |                  |                  |                               | \$1,464.00       |
|        | Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28). |                  |                  |                               |                  |
|        | TOTAL =  |                  |                  |                               | \$1,464.00       |

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1,464.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

|           |                           |
|-----------|---------------------------|
| NAME      | Joseph W. Ragusa (38,586) |
| SIGNATURE | Joseph W. Ragusa          |
| DATE      | March 8, 2000             |

TITLE OF THE INVENTION  
IMAGE PROCESSING APPARATUS AND METHOD, AND STORAGE  
MEDIUM

5 FIELD OF THE INVENTION

The present invention relates to an image processing apparatus and method, and a storage medium.

BACKGROUND OF THE INVENTION

10 Conventionally, a system as shown in Fig. 1 is known as the above-mentioned system.

Fig. 1 schematically shows the arrangement of a system that creates a page layout document of DTP or the like, or a wordprocessing or graphic document using a  
15 host computer 101, and outputs such document as a hardcopy via a color laser beam printer, ink-jet printer, or the like.

Reference numeral 102 denotes an application which runs on the host computer. For example, document edit  
20 application software such as "WORD®" available from Microsoft Corporation, page layout software such as PageMaker® available from Adobe Systems Incorporated, and the like are representative ones.

A digital document created by such software is  
25 passed on to a printer driver 103 via an operating system (OS: not shown) of the computer.





However, a method of converting R, G, and B into C, M, Y, and K is not uniquely determined, and an optimal conversion method differs depending on the attributes of figures defined by PDL. For example, referring to  
5 Fig. 2A, reference numeral 114 denotes a natural image scanned by, e.g., a scanner; 115, graphic images such as a rectangle and the like, which are electronically generated; and 116, character (TEXT) images. That is, these images have different attributes.

10 When the color of each TEXT image 116 is defined as black ( $R = G = B = 0$ ), optimal C, M, Y, and K signals corresponding to this color are expressed by 8-bit density signals  $C = M = Y = 0$  and  $K = 255$ . That is, a black character is preferably reproduced using only  
15 black toner of the four color toners of the printer.

On the other hand, when a specific pixel value of the natural image 114 is  $R = G = B = 0$ , if that value is converted into  $C = M = Y = 0$  and  $K = 255$  in the same manner as the character data, the highest density  
20 portion in the natural image is reproduced using only black toner, and the absolute density becomes insufficient. In this case, a better result is obtained when this pixel value is converted into a value given by  $C = M = Y = 100$  and  $K = 255$  to increase the absolute  
25 density.



preferably undergo binarization that uses a small matrix size of dithering and attaches importance on resolution. On the other hand, a natural image such as a photo or the like preferably undergoes binarization that uses a large matrix size, and attaches importance on tone reproduction.

In this case as well, the multi-valued bitmap image data transferred from the image memory may undergo image area separation to adaptively switch the dither matrix size. However, the same problem as in the above case cannot be prevented.

To avoid such problem, the present applicant has proposed the following method (U.S. Patent Application No. 09/434,404). That is, upon rendering a PDL image into a bitmap, attribute information indicating whether the rendered image data corresponds to a natural image area or character/figure area is generated at the same time, and is rendered into a two-dimensional bitmap like the bitmap image. Upon transferring the rendered image data to the image forming unit, the attribute information is transferred at the same time, and different image processes are done on the basis of the attribute information to output a hard copy.

In this case, different dither matrices or different color processes can be applied in correspondence with the aforementioned image attributes.



However, when partial images having different attributes are rendered on an identical coordinate position (for example, characters are overwritten on a natural image, or a photo is pasted on a graphic figure), attribute  
5 setups of those portions may suffer certain conflicts.

Such conflicts take place when an achromatic gray graphic figure is overwritten on a color natural image and the natural image as the background is set to be seen through the interior of the figure. At this time,  
10 since the figure to be overwritten is achromatic, it should be an area to be reproduced using black alone and, for this reason, attribute information indicating a monochrome object is appended to that graphic area. However, since that figure is overwritten so that the  
15 background color image can be seen through, if it is reproduced using black alone, color information of the natural image to be seen through in the background is lost.

The two-dimensional map of the attribute  
20 information described above also suffers the following problem.

When the object to be processed is only a natural image such as the image 114 shown in Fig. 2A, such method suffices for use. However, when a character  
25 (TEXT) image is included in the natural image like an image 7b shown in Fig. 2B, since an attribute "natural

image" is determined, a process that is not suitable for the property of the character (TEXT) image is highly likely to be done.

In order to solve such problem, the rasterizer 105 renders R, G, and B signal values into a bitmap image without converting them into C, M, Y, and K signals, and the image forming unit 108 detects a character image area from the received RGB bitmap image using known image area separation, and uses different RGB to CMYK conversion methods for the detected character image area and other areas to generate and output CMYK data.

However, when the entire image undergoes the image area separation, it is time-consuming, and even a pixel of a character may be erroneously determined not to be a character depending on the precision of image area separation.

Especially, when a CPU processes an image area separation program without any hardware, software processes require a longer time.

#### SUMMARY OF THE INVENTION

It is an object of the present invention to provide an image processing apparatus and method, and a storage medium, which can solve the aforementioned problems.



Fig. 1 is a block diagram showing an example of the arrangement of a conventional system;

Figs. 2A and 2B are views for explaining an image output sequence using PDL (page description language);

5 Fig. 3 is a block diagram for explaining the arrangement according to an embodiment of the present invention;

Fig. 4 is a table showing the relationship between the image attributes and attribute map;

10 Fig. 5 shows an example of a PDL document to which the embodiment shown in Fig. 3 is applied;

Figs. 6A to 6F show parts shown in Fig. 5 in units of attributes;

Figs. 7A to 7C are views for explaining attribute map information generated for the document shown in Fig. 5;

Figs. 8A to 8C show examples of dither matrices;

Fig. 9 is a block diagram of a rendering process;

Fig. 10 is a sectional view of an LBP;

20 Fig. 11 is a block diagram showing the arrangement of the fourth embodiment;

Fig. 12 shows object information 305;

Fig. 13 is a flow chart showing the processing sequence of the fourth embodiment;



Fig. 27 shows an attribute map generated from the image shown in Fig. 26;

Fig. 28 shows an example of a dither matrix of the fifth embodiment;

5        Fig. 29 is a view for explaining the range to undergo an image area separation process of the fifth embodiment;

Fig. 30 shows an example of a dither matrix of the fifth embodiment;

10       Fig. 31 is a flow chart showing the processing flow executed in the fifth embodiment; and

Fig. 32 is a block diagram showing the arrangement of an image processing system of the sixth embodiment.

15       DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS  
[First Embodiment]

The preferred embodiments of the present invention will be described in detail hereinafter with reference to the accompanying drawings.

20       Fig. 3 is a system block diagram showing the arrangement according to an embodiment of the present invention. Referring to Fig. 3, reference numerals 10 to 15 denote the same components as the components 101 to 106 shown in Fig. 1. Also, reference numerals 18 and 19  
25       denote the same components 107 and 108 in Fig. 1.

A characteristic feature of this embodiment lies in an attribute map memory 16 and image processing unit 17. Note that the image processing unit 17 is depicted as a standalone unit, but may be included in a raster image processor 13 or color printer 18. Also, a rasterizer 14 may be a standalone device or may be included in a host computer 10 or the color printer 18.

The rasterizer 14 generates a bitmap image on an image memory 15 on the basis of commands corresponding to individual image parts (to be referred to as objects hereinafter) that form an image. At this time, the rasterizer 14 generates attribute map information on the basis of the attributes of the image parts and the generated information in an attribute map memory 16.

Assume that the rasterizer 14 in this embodiment generates R, G, and B 8-bit bitmap images per pixel upon generating a bitmap image on the image memory 15 (hence, the image memory 15 is initialized by data FFh representing "white" every time image recording for one page is completed).

Fig. 4 shows an example of the relationship between the part attributes and attribute map information in this embodiment.

Note that each attribute map information is 3-bit flag information, and is generated in accordance with six different part attributes, as shown in Fig. 4. The

attribute map information includes three attributes,  
i.e., vector attribute, character attribute, and color  
attribute. The vector attribute assumes "0" when a given  
part (object) is a natural image, or "1" when it is a  
5 graphic object such as a character, figure, or the like.  
The character attribute assumes "0" when a given object  
is a natural image or graphic object, or "1" when it is  
a character object. The color attribute is determined  
based on whether an object is color (chromatic) or  
10 monochrome (achromatic), and is set at "0" when a given  
object is a color object irrespective of a natural image,  
character, or graphic object, or "1" in case of a  
monochrome object. Note that these objects are  
definitions for one object. For example, a color  
15 attribute = "0" indicates that the entire object is  
chromatic, but does not indicate that the pixel of  
interest is chromatic.

Referring back to Fig. 3, the image processing  
unit 17 executes various image processes for bitmap data  
20 in the image memory 15, and outputs the processed data  
to the color printer. At this time, the unit 17 switches  
the image processing method as needed with reference to  
the attribute map information stored in the attribute  
map memory 16 in accordance with the rules shown in  
25 Fig. 4 (to be described in detail later).





different attributes, and Figs. 6A to 6F respectively depict the document decomposed in units of attributes.

Fig. 6A depicts a color natural image object, and Fig. 6B depicts only a monochrome natural image object.

5 Likewise, Fig. 6C depicts a color character object, Fig. 6D a monochrome character object, Fig. 6E a color graphic object, and Fig. 6F a monochrome graphic object. When all these objects are superposed on each other, the document shown in Fig. 5 is obtained.

10 Areas occupied by these objects shown in Figs. 6A to 6F respectively correspond to individual attributes in the left column in Fig. 4, and attribute map information is generated at the coordinate position of each object in accordance with the rules shown in Fig. 4,  
15 and is written in the attribute map memory 16.

For example, values, i.e., vector attribute = 0, character attribute = 0, and color attribute = 0 are written as attribute map information in a rectangular area on the attribute map memory 16 where the image  
20 shown in Fig. 6A is present.

Also, in the monochrome natural image area shown in Fig. 6B, color attribute = 1 is generated in a rectangular area where the image is present (other attributes, i.e., vector and character attributes are  
25 "0").

Furthermore, vector attribute = 1, character attribute = 0, and color attribute = 0 are generated in Fig. 6E, and vector attribute = 1, character attribute = 0, and color attribute = 1 are generated in Fig. 6F.

As can be seen from Figs. 6A to 6F, objects having different attributes are rendered at an identical position on the bitmap memory to overlap each other. For example, a lower right triangle object in Fig. 6F is  
15 overwritten on a lower right natural image portion in Fig. 6B.

In such case, since the last rendered object is overwritten on the bitmap image, the attribute information of the last rendered object is overwritten on the attribute map information. That is, in case of Fig. 5, the attribute information of the triangle graphic object is finally saved in the attribute map memory.

However, when different objects are to be rendered  
25 at an identical coordinate position to overlap each  
other, and the already rendered image data is to remain



given bit of attribute information of the object to be rendered is "1", the attribute information of that bit becomes "1"; otherwise, it is reset to "0".

Note that attribute information is compared in units of bits. Alternatively, whether or not all three pieces of attribute information match may be checked, and if they match, the attributes may be saved; otherwise, the attributes may be reset to "0".

In the former case, assuming that the already rendered image is a monochrome graphic object, and an object to be rendered while being overwritten on that image is a color character object, since their vector attributes are "1", the attribute to be saved remains "1". However, since the character attribute of the former object is "0" and that of the latter object is "1", the attribute is reset to "0". Also, since the color attribute of the former object is "1", and that of the latter object is "0", that attribute is also reset to "0".

Hence, the attribute information generated at that pixel position in this case includes vector attribute = 1, and character attribute = color attribute = 0, and the objects at that pixel position are handled as a color graphic object.

Three pieces of attribute information shown in Figs. 7A to 7C are generated in the aforementioned

procedures, and Figs. 7A, 7B, and 7C respectively show the vector, character, and color attributes. In these figures, an area painted in black indicates a portion where the corresponding attribute = "1".

5        Since the initial state corresponds to all "1"s, in case of the vector attribute shown in Fig. 7A, only areas where objects with vector attribute = 0, i.e., natural images are rendered, are set with "0", and the remaining portion is set with "1".

10       Likewise, in the character attribute shown in Fig. 7B, "0" is set in areas where non-character objects are rendered. Furthermore, in Fig. 7C, when a color object is rendered, attribute information in that area is reset to "0".

15       In this manner, the attribute map information is generated.

      The bitmap image data rendered on the image memory 15 and the attribute map data stored in the attribute map memory 16 are transferred to the image processing 20 unit 17 together with sync signals (not shown).

      At this time, data at a predetermined pixel position of the image memory 15, and attribute map data of a corresponding pixel must be transferred in correspondence with each other. That is, when the pixel 25 value of a specific pixel in the image memory is transferred to the image processing unit, attribute map



pixels, and is binarized using a value in each cell of the dither matrix as a threshold value, thus controlling the ON/OFF state of each output pixel. Fig. 8A shows a dither matrix having a  $3 \times 3$  size, which can express 10 gray levels at a resolution of 200 dpi if one pixel = 600 dpi. Fig. 8B shows a dither matrix having a  $5 \times 5$  size, which can express 120 dpi/26 gray levels. Fig. 8C shows a dither matrix having an  $8 \times 8$  size, which can express 75 dpi/65 gray levels.

- 10       Therefore, the attribute map information corresponding to the pixel of interest is referred to, and if that pixel belongs to a continuous tone area, i.e., it has vector attribute = "0", the corresponding image data is binarized using the matrix shown in
- 15       Fig. 8C. On the other hand, if the pixel of interest belongs to a graphic area, i.e., it has vector attribute = "1" and character attribute = "0", the corresponding image data is binarized using the matrix shown in
- 20       Fig. 8B. Furthermore, when the pixel of interest belongs to a character area, i.e., it has vector attribute = "1" and character attribute "1", the matrix shown in Fig. 8A is used. In this manner, for example, a photo or the like is reproduced using a matrix having a larger size while attaching importance on tone reproduction
- 25       characteristics, a character is reproduced at a higher resolution using a matrix having a smaller size, and a



graphic is reproduced using an intermediate matrix size therebetween, thus obtaining a high-quality output image.

As described above, according to this embodiment, objects which are described in PDL and are to be recorded are rendered into a bitmap image for one page, and attribute information of each object is generated in correspondence with the bitmap image in accordance with the attribute (a character, line image, or halftone image such as a photo image) of that object in units of pixels. Even when different attributes are present at an identical position, they are corrected to an attribute suitable for the different overlapping attributes as needed, thus recording an image with higher quality. [Second Embodiment]

In the above embodiment (first embodiment), attribute map data is read out from the attribute map memory 16 in synchronism with pixel data (RGB data) from the image memory 15, and the image processing unit 17 switches the dither matrix size in accordance with the readout attribute map data.

However, a UCR process used upon converting RGB → YMCK may be controlled in accordance with the attribute map data.

For example, if all the vector, character, and color attributes in the attribute map data are "0", i.e., that pixel belongs to a color photo image or the like,

an 80% UCR process is done in place of a 100% UCR process to decrease the Bk amount, thus making correction that allows recording using all the recording color components.

5           When the pixel of interest has no color attribute, image recording is controlled to be done using only a Bk component. For example, even when the pixel of interest belongs to, e.g., a photo image, if that image area does not have any color attribute, only a Bk component is  
10       output, and "0" is forcibly output as other components (C, M, and Y).

          When the pixel of interest belongs to a character or vector image and has a color attribute in accordance with the attribute map data, the corresponding image  
15       data undergoes a 100% UCR process.

          As described above, according to the second embodiment, the same effect as in the first embodiment can be provided.

          Note that the first and second embodiments may be  
20       combined as needed (both the binarization control and UCR control may be done according to the attribute map).  
      [Third Embodiment]

          In the first and second embodiments, three different attributes respectively indicating whether the  
25       pixel of interest is a vector image or not, a character or not, and color or monochrome have been explained. Of

00521850-030900

course, the present invention is not limited to these specific attributes. For example, various other kinds of flag information, e.g., a flag that identifies the hue or saturation of a given color of a color object, a flag indicating if the pixel of interest belongs to an edge portion of a given object, and the like may be used.

Also, the image processing methods to be switched based on the attribute map information are not limited to those in the above embodiments. For example, various other image processes such as an edge emphasis process (edge emphasis filter), a compression method upon compressing bitmap data and transferring it to the printer, and the like may be switched.

As a rule for generating new attribute information on the basis of attribute information of two objects, when the attribute information values of the two object are equal to each other, that value is used in this embodiment; otherwise, the attribute is reset to zero. This process is equivalent to ANDing of two attribute information values. However, the present invention is not limited to such process. for example, two attributes may be ORed to preferably set an attribute = "1", attribute information of the overwritten object may always be used, or attribute information of the already saved object may be preserved.

Furthermore, in the above embodiments, bitmap  
image data of R, G, and B luminance components are  
rendered on the image memory 15. Alternatively, bitmap  
image data of Y, M, and C or Y, M, C, and K density  
5 components may be rendered.

In the above embodiments, the color LBP has been  
exemplified as the image forming unit. Alternatively,  
the present invention may be applied to an image forming  
unit which uses PWM and is capable of multi-valued image  
10 recording. In this case, since the need for conversion  
into one pixel into one bit (binarization process) can  
be obviated, the attribute map information can be  
applied to an RGB  $\rightarrow$  YMCK conversion process, an edge  
emphasis process of density converted image data, or the  
15 like.

The recording scheme is not limited to that of the  
laser beam printer. For example, an engine that ejects  
ink droplets, or any other engines may be used. That is,  
an optimal recording process can be selected as needed  
20 in accordance with the attribute information stored in  
the attribute map memory 16.

Furthermore, in the above embodiments, the raster  
image processor 13 is interposed between the host  
computer 10 and color printer 18. Alternatively, the  
25 raster image processor 13 may be incorporated in the

housing of the color printer, or may be implemented as one of processes of the host computer 10.

In the latter case, the raster image processor can be built in especially as one of functions of the printer driver 12. Hence, the present invention can also be achieved by supplying, to a system or apparatus, a storage medium that stores program codes of software, which implements the functions of the above embodiments, and reading out and executing the program codes stored in the storage medium by a computer (or a CPU or MPU) of the system or apparatus.

As described above, according to the first to third embodiments, a mixed image which is expressed by print information described in the command format and has different attributes can be printed out with higher image quality.

[Fourth Embodiment]

The fourth embodiment will be described below.

As has been early in the paragraphs of the prior art, after image data is rendered into a bitmap image, as shown in Fig. 9, objects from which the bitmap is created cannot be determined, and source object information cannot be accurately recognized after rendering, thus disturbing a post-process such as accurate edge extraction.

09521250.030900

A rendering engine premised on rendering models on the basis of a Painter, S algorithm like PostScript® is described, but information bits that indicate the types of objects upon synthesizing objects (ROP or object synthesis with transparency) are lost.

The embodiment that can solve the above problems will be explained below.

Fig. 10 is a sectional view showing the internal structure of a laser beam printer (to be abbreviated as an LBP hereinafter) used in this embodiment. In this LBP, character patterns, standard formats (form data), and the like can be registered from a data source such as a host computer or the like (not shown).

Referring to Fig. 10, reference numeral 1000 denotes an LBP main body, which receives and stores character information (character code), form information, macro commands, and the like supplied to an externally connected host computer, generates a corresponding character pattern, form pattern, and the like in accordance with such information, and forms an image on a recording paper sheet as a recording medium. Reference numeral 1012 denotes a control panel on which switches, LED indicators, and the like for operations are arranged; and 1001, a printer control unit for controlling the overall LBP 1000 and interpreting character information or the like supplied from the host

computer. The control unit 1001 mainly converts character information into a video signal of a corresponding character pattern, and outputs it to a laser driver 1002. The laser driver 1002 is a circuit for driving a semiconductor laser 1003, and controls to turn on/off a laser beam 1004 emitted by the semiconductor laser 1003 in accordance with the input video signal. The laser beam 1004 is deflected in the right-and-left direction by a rotary polygonal mirror 1005 to scan the surface of an electrostatic drum 1006. On the surface of the electrostatic drum 1006, an electrostatic latent image of the character pattern is formed. This latent image is formed in units of yellow, magenta, cyan, and black colors, is developed by each of yellow, magenta, cyan, and black developing units 1007, and is then transferred onto a recording paper sheet. The recording paper sheet uses a cut sheet, which is housed in a paper cassette 1008 loaded into the LBP 1000. The recording paper sheet is fed into the apparatus by a paper feed roller 1009 and convey rollers 1010 and 1011, and is supplied to the electrostatic drum 1006.

In the printer system with the above arrangement, this embodiment will be described below along the flow chart shown in Fig. 13 with reference to Figs. 11 and 12.

25 Referring to Fig. 11, reference numeral 301  
denotes a PDL interpreter for interpreting PDL (page

- 30 -



selected when the bitmap flag is "1" (= vector data) (to be referred to as a character flag hereinafter).

The processing sequence in the processing blocks shown in Fig. 11 will be described below using Fig. 13.

- 5        Upon receiving print data by the LBP 1000 (step 502), the PDL interpreter 301 interprets the received data (step 503). The PDL interpreter 301 outputs the interpretation result, i.e., the object 302 as one rendering command of one object in most cases (step 504).
- 10    The graphic library 303 interprets the object 302 (step 505), and generates the command 304 appended with the object information flags 305 on the basis of the interpretation result (step 506).

- The rendering engine 306 renders the command 304
- 15    and object information flags 305 to generate the bitmap image 307 (step 507). At this time, data to be rendered is the command 304 alone, and the object information flags 305 are output through the engine 306 and are appended to each pixel of the rendering result. The
- 20    pre-processing module 308 performs a pre-process for printing the bitmap image 307 by the engine 309 (step 508). More specifically, the module 308 executes RGB 24 bits → CMYK 1 bit conversion (color conversion, binarization), a black character process (process for
- 25    rendering a character using black alone when a character has a pixel value which is very close to black), and the

like. The engine 309 prints the process result (step 509), thus ending the processing.

In the above arrangement, the rendering result of the rendering engine is 8 bits/pixel for each of R, G, and B data. As for rendering engines that render in other color spaces, the same result can be obtained.

As described above, since each pixel can hold source object information even after rendering, post-processes such as more accurate edge extraction and the like can be achieved.

In the description of the above arrangement, the information of the source object is accurately recognized using the object information after rendering.

An example of an image processing apparatus which can hold object information upon object synthesis will be described below.

Since the apparatus arrangement is the same as that shown in Fig. 10, a detailed description thereof will be omitted.

Referring to Fig. 14, reference numeral 601 denotes a PDL interpreter for interpreting PDL data. Reference numeral 602 denotes an object created by the PDL interpreter. Reference numeral 603 denotes a graphic library which converts the object 602 into a command 604 that a rendering engine can interpret, and appending object information flags 605 to the command 604 (refer

09521850.030900

to Fig. 15 (to be described later) for details of object information). Reference numeral 606 denotes a rendering engine. Reference numeral 607 denotes a bitmap image of (8 bits for each of R, G, and B + object information

5 bits (3 bits))/pixel.

Fig. 15 shows details of the object information 605. The object information uses 3 bits: bit 0 indicates if the pixel of interest belongs to a bitmap object or vector graphic (to be referred to as a bitmap flag hereinafter), bit 1 indicates if the pixel of interest belongs to a color object (to be referred to a color flag hereinafter), and bit 2 indicates if the pixel of interest belongs to an object other than a character or a character when the bitmap flag is "0" (= bitmap data),

10 and indicates if a tone or resolution priority mode is selected when the bitmap flag is "1" (= vector data) (to be referred to as a character flag hereinafter).

Fig. 16 is a table showing the object synthesis method upon logic rendering.

20 When an object is S (only source, i.e., when an object is overwritten) or NotS (NOT of source = the source bit is 0/1-inverted and the object is overwritten), the information bits of the bitmap flag, color flag, and character flag of the object to be

25 overwritten are left in the bitmap image 607. When an object is D (only destination, i.e., when a background

is used) or NotD (NOT of destination = the destination bit is 0/1-inverted), the information bits of the bitmap flag, color flag, and character flag of the background are left. When SorD (OR of S and D), SandD (AND of S and D), SxorD (XOR of S and D), and SαD (α blend operation of S and D = AND, OR, or XOR of S and D with transparency) are made, 3 bits, i.e., the bitmap, color, and character flags of the object to be overwritten and those of the background shown in Fig. 15 are respectively ANDed to determine the information bits.

The flow of the processing in this embodiment will be described below with reference to Fig. 17.

Upon receiving print data by the LBP 1000 (step 902), the PDL interpreter 601 interprets the received data (step 903). The PDL interpreter 601 outputs the interpretation result, i.e., the object 602 as one rendering command of one object in most cases (step 904). The graphic library 603 interprets the object 602 (step 905), and generates the command 604 appended with the object information flags 605 on the basis of the interpretation result (step 906). Upon receiving data of the command 604 + flags 605, the rendering engine 606 checks if a synthesis process is required (step 907). If no object synthesis instruction is found, the engine 606 overwrites objects (step 909); if an object synthesis instruction is found, the engine 606 synthesizes objects

on the basis of Fig. 16. Also, the engine 606 synthesizes the object information flags. The engine 606 then outputs 8 bits for each of synthesized (overwritten) R, G, and B data + flag synthesized information bits as a rendering result. Note that flags are in units of pixels (step 908). It is checked if all data to be rendered have been processed (step 910). If N in step 910, the processing restarts from step 902; otherwise, the bitmap data 607 are determined (step 911), thus ending the processing (step 912). Note that the determined bitmap data 607 is used in the process as in steps 508 and 509.

In the above description, upon making SorD, SandD, SxorD, or SαD, 3 bits, i.e., the bitmap, color, and character flags of S (object to be overwritten) and those of D (background) are respectively ANDed to determine information bits (3 bits) at the position where the object is overwritten on the background. Then, with reference to these information bits, the presence/absence of the binarization method, color conversion method, and black character process upon converting RGB 24 bits (8 bits for each of R, G, and B data) into CMYK 1 bit is determined.

However, some operators may not prefer a color print result of the processes which are done with

reference to the aforementioned information bits  
obtained by ANDing.

To combat this problem, in the fifth embodiment,  
upon receiving a command input by the user from a host  
5 computer (not shown) connected to the LBP on the printer  
driver, ANDing of the information bits upon making SorD,  
SandD, SxorD, or S&D is inhibited, and the information  
flags are forcibly set to be all "0"s, as shown in  
Fig. 18. In this case, a portion that has undergone the  
10 synthesis process on a print does not undergo any  
process with reference to the information bits.

As a result, both the process using the  
information bits and the process without using any  
information bits can be selected for a portion that has  
15 undergone the synthesis process depending on operator's  
taste, and a print more suitable for the operator's  
taste can be obtained.

In the above synthesis process, object synthesis  
for synthesizing one object with the background by a  
20 two-term operation has been exemplified. Even when two,  
three,... objects are to be synthesized, i.e.,  
three-term, four-term,... operations are made, they can  
be mathematically replaced by a set of two-term  
operations, and the above embodiment can be applied to  
25 such operations.

In the above description, if it is determined in step 910 that the data process is to proceed, the processing restarts from step 902 (= an example without any reception buffer). When the command 604 can store all print data, the processing can restart from step 907. When the object 602 can store all print data, the processing can restart from step 905.

The rendering result of the rendering engine is 8 bits/pixel for each of R, G, and B data. As for rendering engines that render in other color spaces, the same result can be obtained.

As described above, even for an object with transparency and an object that requires ROP, each pixel can hold source object information after rendering.

Since various image processes such as a black character process, binarization, filtering, and the like can be controlled on the basis of information of the types of objects, reproducibility of a character and the like can be improved.

Since object type flags can be inhibited from being synthesized as needed, data after rendering, that has undergone the synthesis process can be prevented from adaptively undergoing image processes.

[Fifth Embodiment]

Fig. 19 is a block diagram showing the arrangement of an image processing system of the fifth embodiment.

Reference numeral 190 denotes a host computer.  
Reference numeral 191 denotes an application such as a  
wordprocessor, draw software, graphic software, or the  
like used in the host computer 190. Reference numeral  
5 192 denotes a printer driver for controlling an  
interface with a color printer 198 upon outputting a  
character, graphic data, or bitmap image from the  
application 191 to the color printer 198.

Reference numeral 193 denotes a raster image  
10 processor for rendering data output via the printer  
driver 192 to obtain image data. The raster image  
processor 193 includes a rasterizer 194, an image memory  
195 for storing image data, and an attribute map memory  
196.

15 Reference numeral 200 denotes an image area  
separation processor for identifying an image, and a  
character/line image in consideration of the edge amount  
of an image and continuity of the edge amount in a given  
area. The image area separation processor 200 is  
20 controlled to process only a given range of image data  
in which the image area separation process is effective,  
in accordance with an attribute map stored in the  
attribute map memory 196. Reference numeral 197 denotes  
an image processor for processing the image data stored  
25 in the image memory 195 to obtain an image with higher  
quality, and to obtain image data an image forming unit



199 (to be described below) can output. The image processor 197 switches its processes in accordance with a signal from the image area separation processor 200. Reference numeral 198 denotes a color printer which includes the image forming unit 199 for printing image data on a recording medium. The image forming unit 199 uses an electrophotographic or ink-jet recording scheme.

Note that details of the attribute map will be described later. The image forming unit 199 will be explained as that of the color printer 198, but this embodiment can be easily applied to even a monochrome printer.

For the sake of simplicity, the image memory 195 and attribute map memory 196 are depicted as independent blocks, but the image data and attribute map can be stored in a single storage medium so that they can be read out.

Digital document data created by the application 191 is expressed by a command system called PDL, as has been explained in the paragraphs of the prior art, and PDL is roughly composed of three objects. The first object is a character object, the second object is a graphic object such as vector data such as a figure, free curve, or the like, and the third object is a bitmap object such as image data obtained by scanning a photo, print, or the like via a scanner or the like.

For example, the character object consists of data such as a character code for identifying a character, a font that defines the shape of the character, size information indicating the character size, color information indicating the character color, and the like, and cannot be directly interpreted by the image forming unit 199. The printer driver 192 interfaces with the color printer 198, and sends a command sequence representing objects such as character, graphic, bitmap, and the like to the rasterizer 194 while attaining, e.g., synchronization so that the image forming unit 199 as the final stage can appropriately output an image. The rasterizer 194 converts the received command sequence into two-dimensional bitmap image data the image forming unit 199 can appropriately interpret, and outputs the attribute map at the same time.

The attribute map is two-dimensional information which has attribute information of each pixel of an object in units of pixels, as has also been described in the first embodiment, and is stored in the attribute map memory 196 so that the two-dimensional image data can correspond to the attribute map in units of pixels.

An example of the format of the attribute map of this embodiment will be described below with reference to Fig. 20.

Fig. 20 shows an example of the format of the attribute map.

The attribute map of this embodiment has 1-bit information consisting of only the 0-th bit, which is a  
5 bitmap flag. If this flag is "1", it indicates a pixel generated from a bitmap object; if the flag is "0", it indicates a pixel generated from a vector object, i.e., a character or graphic image. The rasterizer 194 finally  
10 checks in units of pixels if the pixel of interest is generated from a character, graphic, or natural image object, and stores that checking result in the attribute map in correspondence with two-dimensional image data.

Fig. 21 shows an example of the attribute map stored in correspondence with image data in units of  
15 pixels.

Fig. 21 depicts an image obtained by superposing a numeral "1" as a character object on a bitmap object. Upon converting into a two-dimensional bitmap, "1" for a  
20 pixel generated from a vector object (character or graphic object), or "0" for a pixel generated from a bitmap object is output in units of pixels according to the format of the attribute map, thus generating the attribute map shown in Fig. 21. Note that the attribute map information is inverted to that in Fig. 20.  
25 Depending on the format used, "1" may be set for a bitmap object and "0" for a vector (character or

graphic) object, as shown in Fig. 20, or "0" for a  
bitmap object and "1" for a vector (character or  
graphic) object, as shown in Fig. 21.

The format of the attribute map is not

- 5 particularly limited as long as attributes can be stored  
in correspondence with each other in units of pixels.  
For example, image data may be stored in the image  
memory 195 using the attribute map shown in Fig. 21 as a  
plane, and the attribute map may be stored in the  
10 attribute map memory 196. When these data are stored in  
a single storage medium, the plane of the attribute map  
may be added to R, G, and B planes, as shown in Fig. 22.  
On the other hand, when R, G, and B data are formed in  
units of pixels, as shown in Fig. 23, the attribute map  
15 may be embedded in the form of information appended to  
the RGB information of each pixel. In order to prevent  
the data size from increasing, the attribute map may be  
embedded in lower bits of each pixel of one or a  
plurality of R, G, and B planes, as shown in Fig. 24.  
20 Alternatively, upon forming R, G, and B data in units of  
pixels, the attribute map may be embedded in lower bits  
of one or a plurality of RED, GREEN, and BLUE color  
information bits (8 bits each), as shown in Fig. 25. In  
the example shown in Fig. 25, the attribute map is  
25 embedded in lower 3 bits of 8-bit BLUE information.

For example, when the attribute map is used, the following process can be done. With reference to the example shown in Fig. 2A, these images have different attributes: an image 114 is a natural image scanned by a scanner or the like, images 115 are graphic images such as a circle, rectangle, and the like, which are generated electronically, and an image 116 is a character (TEXT) image. Note that the image forming unit 199 may reproduce only binary dots. In such case, the rasterizer 194 renders Y, M, C, and K multi-value bitmap images on the image memory 195. Upon receiving these bitmap images, the image forming unit 199 converts the multi-valued image signals into binary image signals by a known binarization process such as error diffusion, dithering, or the like and then prints them out. At this time, an optimal binarization method varies depending on image attributes. That is, graphic data such as characters, figures, and the like preferably undergo binarization that uses a small matrix size of dithering and attaches importance on resolution. On the other hand, a natural image such as a photo or the like preferably undergoes binarization that uses a large matrix size, and attaches importance on tone reproduction.

In view of the foregoing, when the aforementioned  
25 attribute map shown in Fig. 20 is used, the character  
image 116 and graphic images 115 have the 0th bit = "0"

of the attribute map, and the natural (bitmap) image 114 has the 0th bit = "1" of the attribute map. For this reason, a natural image, character image, and graphic image can be easily segmented in units of pixels. Note  
5 that a bitmap object which is assigned as a natural image to the attribute map may include a character image which is scanned from an original using a scanning device such as an image scanner or the like and is present on the original in addition to a so-called  
10 natural image such as a photo, printed matter, or the like. In this case, according to the attribute map described so far, information is stored as a natural image, and that image undergoes a binarization process that attaches importance on tone reproduction. As a  
15 result, the character image present on the bitmap object is converted into a low-resolution image, which is not easy to read.

To prevent such problem, in this embodiment, the image area separation processor 200 detects a character  
20 image area present on the bitmap object. The image area separation processor 200 is a means for determining a character portion or a portion other than the character portion in units of pixels or blocks. The image area separation processor 200 cannot always perfectly  
25 determine characters on an original. When an object such as a character object requires no image area separation

process, such object does not preferably undergo the process, since a portion that is not recognized as a character may be erroneously determined. In general, since the image area separation process requires a large computation amount, it is important to limit the range for the purpose of a short processing time. Especially, when image area separation is done by software (e.g., the CPU processes an image area separation program) in place of any hardware, the load on resources such as the CPU and the like can also be reduced. For this reason, in this embodiment, the image data range that undergoes the image area separation process by the image area separation processor 200 is limited in accordance with the attribute map.

15       An example of the image area separation process executed by the image area separation processor 200 will be described below with reference to Fig. 26.

Fig. 26 shows an image after image data is rendered to a bitmap image.

20       Reference numeral 26a denotes the vector objects of characters "ABC" and "いろは"; and 26b, a bitmap object. Fig. 27 shows the attribute map generated from the image shown in Fig. 26. A rectangle painted in black corresponds to "1"s set in the attribute map, and is generated from the bitmap object 26b. Although an alphabet "H" is drawn in the bitmap object 26b, since

that character is drawn in an image, it is also expressed as a bitmap object on the attribute map. The image area separation processor 200 executes an image area separation process for only the range with the bitmap object attribute on the attribute map corresponding to the image shown in Fig. 26 so as to prevent the vector objects 26a from being erroneously determined as bitmap objects and to reduce the computation volume.

- 10       Subsequently, a dither matrix shown in, e.g., Fig. 28 is used for a range other than the range that undergoes the image area separation process and pixels or blocks which are determined to be characters in the image area separation process. Fig. 29 shows this range.
- 15       A blank portion corresponds to the range for which the dither matrix shown in Fig. 28 is used. As can be seen from a comparison with Fig. 27, the character "H" portion in the bitmap object is added. On the other hand, a dither matrix shown in Fig. 30 is used for pixels
- 20       which are determined to be a natural image in the image area separation process. Such pixels correspond to a black portion in Fig. 29.

- Assuming that multi-valued data used is 8-bit data and ranges from 0 to 255 levels, when the value of
- 25       multi-valued data of each pixel is larger than a threshold value of each cell in the dither matrix shown



in Fig. 28 or 30, that dot is turned on; otherwise, the dot is turned off. Fig. 28 shows the dither matrix having a  $3 \times 3$  size, which can reproduce an image at a resolution of 200 dpi and has 10 gray levels, if one pixel is 600 dpi. Hence, although the number of gray levels is small, an image can be reproduced at high resolution. On the other hand, Fig. 30 shows the dither matrix having an  $8 \times 8$  size, which can express 65 gray levels at 75 dpi, if one pixel is 600 dpi. Although the resolution is low, the number of gray levels is large, and a natural image can be reproduced with higher quality than the dither matrix shown in Fig. 28. With this arrangement, a character in a bitmap object can be output at a high resolution, and other bitmap object portions can be output using a larger number of gray levels while eliminating determination errors of the image area separation process and reducing the computation volume.

The processing flow of the processing executed in the fifth embodiment will be described below using Fig. 31.

Fig. 31 is a flow chart showing the processing flow executed in the fifth embodiment.

In step S1001, a plurality of objects that form input image data are rendered to bitmap image data by the rasterizer 194. The rendered bitmap image data is

stored in the image memory 195. In step S1002, the attribute map of the bitmap image data is generated on the basis of the rendered bitmap image data and attributes of the objects. The generated attribute map is stored in the attribute map memory 196. In step S1003, the range in the bitmap image data, which is to undergo the image area separation process, is determined on the basis of the generated attribute map, and the image area separation processor 200 executes that process for the determined range. Then, the image forming unit 199 forms an image obtained after the image processes of the image processor 197 for the bitmap image data that has undergone the image area separation process and the remaining bitmap image data.

As described above, the range in the bitmap image data to be output, to which the image area separation process is effectively applied, is specified using the attribute map, and only the specified range undergoes the image area separation process. In this manner, determination errors of pixels that belong to a character can be eliminated, and the computation volume of the image area separation process itself can be reduced. Also, by configuring the image area separation process result to designate the attribute map more finely, an image more suitable for the operator can be reproduced.

[Sixth Embodiment]

In the sixth embodiment, as shown in Fig. 32, a character image area detected by an image area separation processor 201 is fed back to update the attribute map in the attribute map memory 196 in the image processing system of the fifth embodiment shown in Fig. 19.

With this arrangement, after the attribute map is generated upon rendering input image data into bitmap data by the rasterizer 194, more than one attribute maps are generated or updated in accordance with the image area separation process result, thus building a system that can realize higher image quality.

The image processor 197 processes individual pixels in image data with reference to the attribute map. That is, the image processor 197 switches a dither matrix used for each pixel in accordance with the attribute map. In this manner, character and graphic images can be reproduced at high resolution while maintaining the tone reproduction characteristics of a natural image in the image data, thus providing a high-quality image.

Even when a natural image includes a character, since the attribute map is updated by the image area separation processor 201, as described above, that

character can be expressed at high resolution, and a higher-quality image can be reproduced.

Since the attribute map is updated, other image processes and finer attributes can be defined, and more  
5 flexible control and higher image quality can be attained.

Note that the arrangement of each of the above embodiments may be applied to either a system constituted by a plurality of devices (e.g., a host  
10 computer, an interface device, a reader, a printer, and the like), or an apparatus consisting of a single equipment (e.g., a copying machine, a facsimile apparatus, or the like).

The above embodiments are also achieved by  
15 supplying a storage medium, which records a program code of a software program that can implement the functions of the above-mentioned embodiments to the system or apparatus, and reading out and executing the program code stored in the storage medium by a computer (or a  
20 CPU or MPU) of the system or apparatus.

In this case, the program code itself read out from the storage medium implements the functions of the above-mentioned embodiments, and the storage medium which stores the program code constitutes the present  
25 invention.

As the storage medium for supplying the program

code, for example, a floppy disk, hard disk, optical disk, magneto-optical disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory card, ROM, and the like may be used.

5 The functions of the above-mentioned embodiments may be implemented not only by executing the readout program code by the computer but also by some or all of actual processing operations executed by an OS (operating system) running on the computer on the basis of an instruction of the program code.

10 Furthermore, the functions of the above-mentioned embodiments may be implemented by some or all of actual processing operations executed by a CPU or the like arranged in a function extension board or a function extension unit, which is inserted in or connected to the  
15 computer, after the program code read out from the storage medium is written in a memory of the extension board or unit.

As many apparently widely different embodiments of the present invention can be made without departing from  
20 the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:  
attribute information generation means for  
generating attribute information indicating an attribute  
of an image in correspondence with a command that  
represents the image;  
bitmap data generation means for generating bitmap  
image data by rendering the command; and  
image processing means for performing an image  
process of the bitmap image data in accordance with the  
attribute information,  
wherein attribute information at an overlapping  
position of first and second images in accordance with  
the command is determined in accordance with attribute  
information of the first image and attribute information  
of the second image.
2. The apparatus according to claim 1, wherein the  
image process is a resolution converting process.
3. The apparatus according to claim 1, wherein said  
bitmap data generation means generates bitmap image data  
by overwriting a rendered bitmap image.
4. The apparatus according to claim 1, wherein the  
image process is at least one of a dither process and  
UCR process.

5. The apparatus according to claim 1, wherein the image process is one of a filter process and compression process.
6. The apparatus according to claim 1, wherein the attribute information at the overlapping position of the first and second images is determined by one of an AND, OR, overwrite priority, and background priority using the attribute information of the first image and the attribute information of the second image.
7. The apparatus according to claim 1, further comprising one of laser print means and ink-jet print means for printing the image that has undergone the image process.
8. The apparatus according to claim 1, wherein the attribute information is generated for each pixel and has at least one of vector, character, and color attributes.
9. An image processing apparatus comprising:  
discrimination means for discriminating a type of object to be rendered;  
determination means for determining the presence/absence of synthesis of the discriminated object;  
synthesis means for synthesizing an object and information of the type of object in accordance with the determination result; and

processing means for appending information  
indicating the type of synthesized object to a rendering  
result obtained by rendering the object to be rendered  
in units of pixels.

5 10. The apparatus according to claim 9, wherein the  
type of object to be rendered includes information  
indicating if an object is a bitmap or a vector graphic.

11. The apparatus according to claim 9, wherein the  
type of object to be rendered includes information  
10 indicating if an object is a color or monochrome object.

12. The apparatus according to claim 9, wherein the  
type of object to be rendered includes information  
indicating if an object is a character or an object  
other than the character.

15 13. The apparatus according to claim 9, wherein the  
type of object to be rendered includes information  
indicating if an object is a tone or resolution priority  
object.

14. The apparatus according to claim 9, further  
20 comprising image processing means for performing an  
image process of data of the rendering result in  
accordance with the information of the type of object.

15. The apparatus according to claim 14, wherein the  
image process includes a binarization process, filter  
25 process, and black character extraction process.



16. The apparatus according to claim 15, wherein the image process outputs rendered data using black alone when it is determined in accordance with information of the object that the object is a black character.

5 17. The apparatus according to claim 9, wherein said synthesis means synthesizes the object in accordance with one of synthesis modes including or, and, xor, and  $\alpha$  blend.

18. The apparatus according to claim 9, wherein the  
10 synthesis is inhibited upon receiving an inhibition  
command of the synthesis process.

19. The apparatus according to claim 18, wherein the inhibition command is input by a printer driver of a host computer connected to said image processing apparatus.

20. The apparatus according to claim 9, wherein the synthesis is done for at least two different objects.

21. An image processing apparatus for processing and outputting input image data, comprising:

20           input means for inputting image data composed of a  
plurality of objects;

```
rendering means for rendering the objects into
bitmap image data;
```

generation means for generating attribute map  
25 information indicating a configuration of the bitmap  
image data on the basis of the bitmap image data

rendered by said rendering means and attributes of the objects; and

determination means for determining a range of the bitmap image data, which is to undergo a predetermined image process, on the basis of the attribute map information generated by said generation means.

22. The apparatus according to claim 21, wherein the predetermined image process is an image area separation process.

23. The apparatus according to claim 21, wherein the attribute map information includes at least a vector flag and bitmap flag.

24. The apparatus according to claim 21, wherein the attribute map information is generated in correspondence with two-dimensional coordinate positions of the bitmap image data.

25. The apparatus according to claim 21, wherein said generation means comprises an attribute map memory for storing the generated attribute map information.

26. The apparatus according to claim 21, wherein when the bitmap image data is managed in units of R, G, and B planes, the attribute map information is managed as an attribute map plane added to the R, G, and B planes.

27. The apparatus according to claim 21, wherein when R, G, and B data of the bitmap image data are managed in



the bitmap data generation step of generating  
bitmap image data by rendering the command; and

the image processing step of performing an image  
process of the bitmap image data in accordance with the  
5 attribute information,

wherein attribute information at an overlapping  
position of first and second images in accordance with  
the command is determined in accordance with attribute  
information of the first image and attribute information  
10 of the second image.

33. A storage medium which stores program codes which  
are loaded and executed by a computer to make the  
computer function as an image processing apparatus, said  
program codes storing:

15 a program code of the attribute information  
generation step of generating attribute information  
indicating an attribute of an image in correspondence  
with a command that represents the image;

a program code of the bitmap data generation step  
20 of generating bitmap image data by rendering the  
command; and

a program code of the image processing step of  
performing an image process of the bitmap image data in  
accordance with the attribute information,

25 wherein attribute information at an overlapping  
position of first and second images in accordance with

the command is determined in accordance with attribute information of the first image and attribute information of the second image.

34. An image processing method comprising:

- 5           the discrimination step of discriminating a type of object to be rendered;
- the determination step of determining the presence/absence of synthesis of the discriminated object;
- 10          the synthesis step of synthesizing an object and information of the type of object in accordance with the determination result; and
- the processing step of appending information indicating the type of synthesized object to a rendering
- 15          result obtained by rendering the object to be rendered in units of pixels.

35. A storage medium which stores program codes which are loaded and executed by a computer to make the computer function as an image processing apparatus, said

- 20          program codes storing:

            a program code of the discrimination step of discriminating a type of object to be rendered;

            a program code of the determination step of determining the presence/absence of synthesis of the

- 25          discriminated object;

a program code of the synthesis step of synthesizing an object and information of the type of object in accordance with the determination result; and

a program code of the processing step of appending  
5 information indicating the type of synthesized object to a rendering result obtained by rendering the object to be rendered in units of pixels.

36. An image processing method for processing and outputting input image data, comprising:

10 the input step of inputting image data composed of a plurality of objects;

the rendering step of rendering the objects into bitmap image data;

the generation step of generating attribute map  
15 information indicating a configuration of the bitmap image data on the basis of the bitmap image data rendered in the rendering step and attributes of the objects; and

the determination step of determining a range of  
20 the bitmap image data, which is to undergo a predetermined image process, on the basis of the attribute map information generated in the generation step.

37. A computer readable memory that stores program  
25 codes of an image process for processing and outputting input image data, comprising:

a program code of the input step of inputting  
image data composed of a plurality of objects;

a program code of the rendering step of rendering  
the objects into bitmap image data;

5       a program code of the generation step of  
generating attribute map information indicating a  
configuration of the bitmap image data on the basis of  
the bitmap image data rendered in the rendering step and  
attributes of the objects; and

10       a program code of the determination step of  
determining a range of the bitmap image data, which is  
to undergo a predetermined image process, on the basis  
of the attribute map information generated in the  
generation step.

ABSTRACT OF THE DISCLOSURE

Upon synthesizing objects, information bits indicating the types of objects are lost. To solve this problem, this invention provides an image processing  
5 apparatus having discrimination means for discriminating a type of object to be rendered, determination means for determining the presence/absence of synthesis of the discriminated object, synthesis means for synthesizing an object and information of the type of object in  
10 accordance with the determination result, and processing means for appending information indicating the type of synthesized object to a rendering result obtained by rendering the object to be rendered in units of pixels.




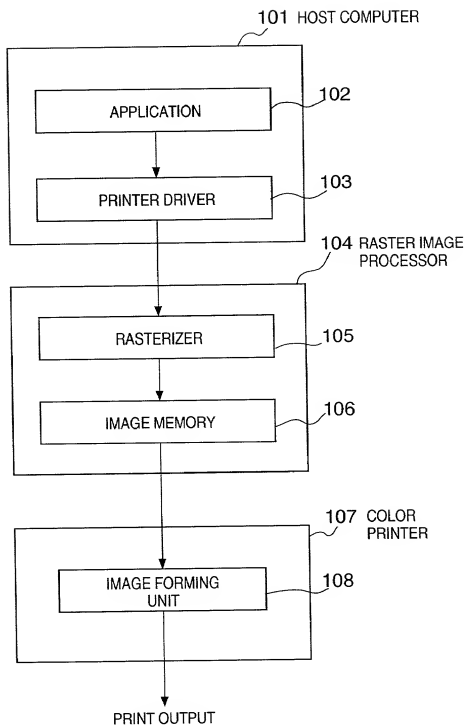
**FIG. 1**

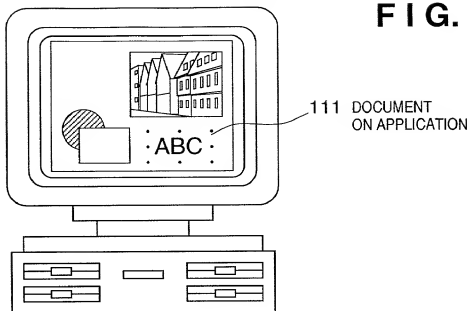FIG. 2A



112 PDL COMMAND SEQUENCE

- CIRCLE / COLOR = GRAY / SIZE = 100 / POSITION = x : 20, y : 40
- RECTANGLE / COLOR = WHITE / SIZE = 40 × 30 / POSITION = x : 25, y : 45
- CHARACTER / CHARACTER STRING = "ABC" / SIZE = 15 POINTS / COLOR = BLACK / POSITION = x : 50, y : 50
- IMAGE / SIZE = 50 × 30 / POSITION = x : 30, y : 5 /  
IMAGE DATA = FFA032D0.....807236CAB0680EF5 /


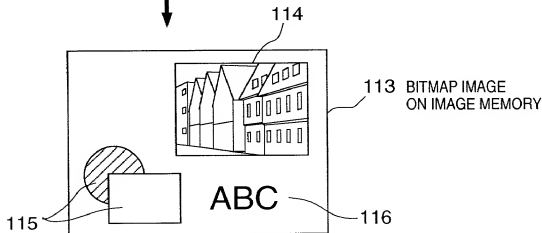


FIG. 2B

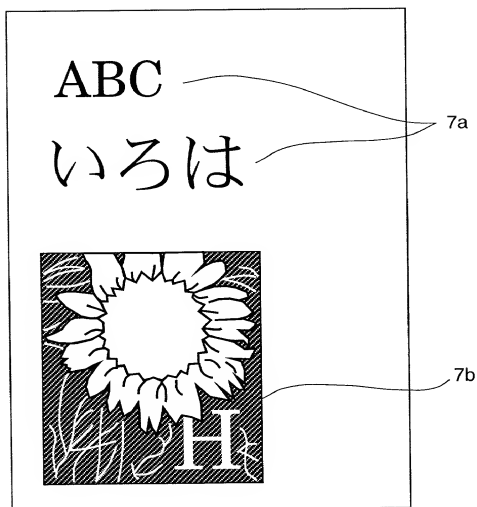

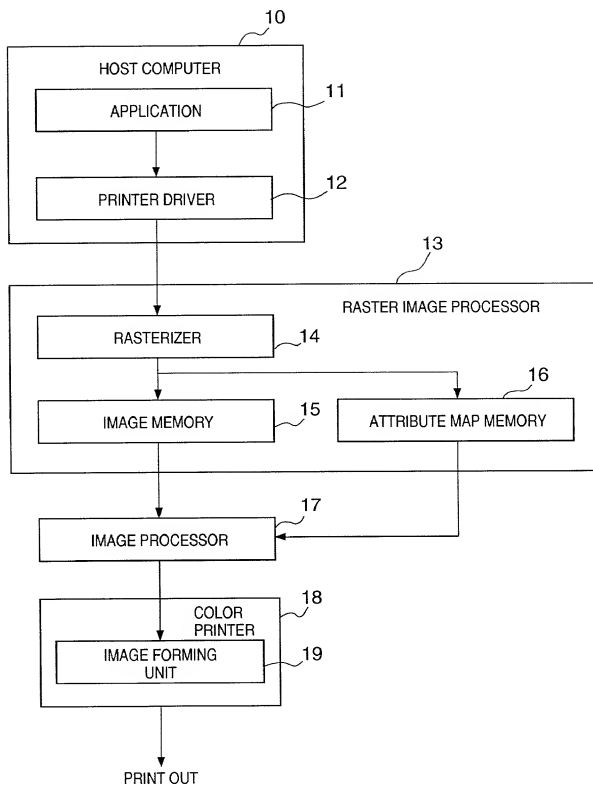
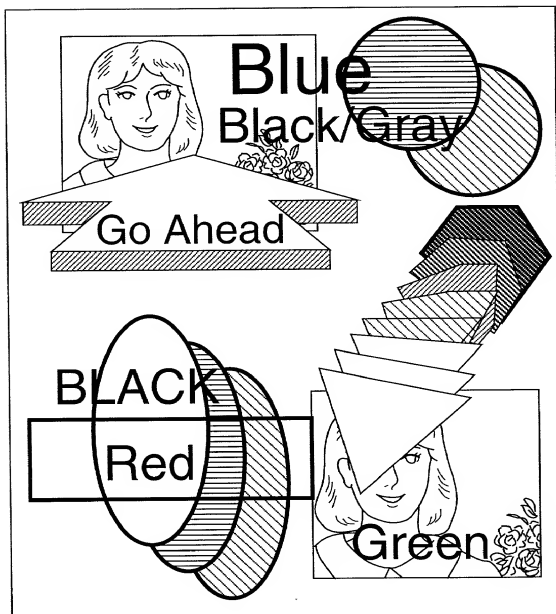






**FIG. 3**

FIG. 4

| ATTRIBUTE<br>MAP INFORMATION | VECTOR<br>ATTRIBUTE | CHARACTER<br>ATTRIBUTE | COLOR<br>ATTRIBUTE |
|------------------------------|---------------------|------------------------|--------------------|
|                              |                     |                        |                    |
| PART ATTRIBUTE               |                     |                        |                    |
| NATURE IMAGE (COLOR)         | 0                   | 0                      | 0                  |
| NATURE IMAGE (MONOCHROME)    | 0                   | 0                      | 1                  |
| CHARACTER (COLOR)            | 1                   | 1                      | 0                  |
| CHARACTER (MONOCHROME)       | 1                   | 1                      | 1                  |
| GRAPHIC (COLOR)              | 1                   | 0                      | 0                  |
| GRAPHIC (MONOCHROME)         | 1                   | 0                      | 1                  |

FIG. 5




**FIG. 6A****FIG. 6B****FIG. 6C****FIG. 6D****FIG. 6E****FIG. 6F**

8/27


# FIG. 7A

VECTOR ATTRIBUTE




# FIG. 7B

CHARACTER ATTRIBUTE



# FIG. 7C

COLOR ATTRIBUTE



09521850.030900



**FIG. 8A**

|     |     |     |
|-----|-----|-----|
| 25  | 50  | 125 |
| 100 | 75  | 150 |
| 225 | 200 | 175 |

**FIG. 8B**

|     |     |     |     |     |
|-----|-----|-----|-----|-----|
| 210 | 220 | 230 | 240 | 250 |
| 200 | 70  | 80  | 90  | 100 |
| 190 | 60  | 10  | 20  | 110 |
| 180 | 50  | 40  | 30  | 120 |
| 170 | 160 | 150 | 140 | 130 |


**FIG. 8C**


|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 172 | 176 | 180 | 184 | 188 | 192 | 196 | 200 |
| 168 | 84  | 88  | 92  | 96  | 100 | 104 | 204 |
| 164 | 80  | 28  | 32  | 36  | 40  | 108 | 208 |
| 160 | 76  | 24  | 4   | 8   | 44  | 112 | 212 |
| 156 | 72  | 20  | 16  | 12  | 48  | 116 | 216 |
| 152 | 68  | 64  | 60  | 56  | 52  | 120 | 220 |
| 148 | 144 | 140 | 136 | 132 | 128 | 124 | 224 |
| 254 | 252 | 248 | 244 | 240 | 236 | 232 | 228 |

0060E\*05812560

10/27

FIG. 9

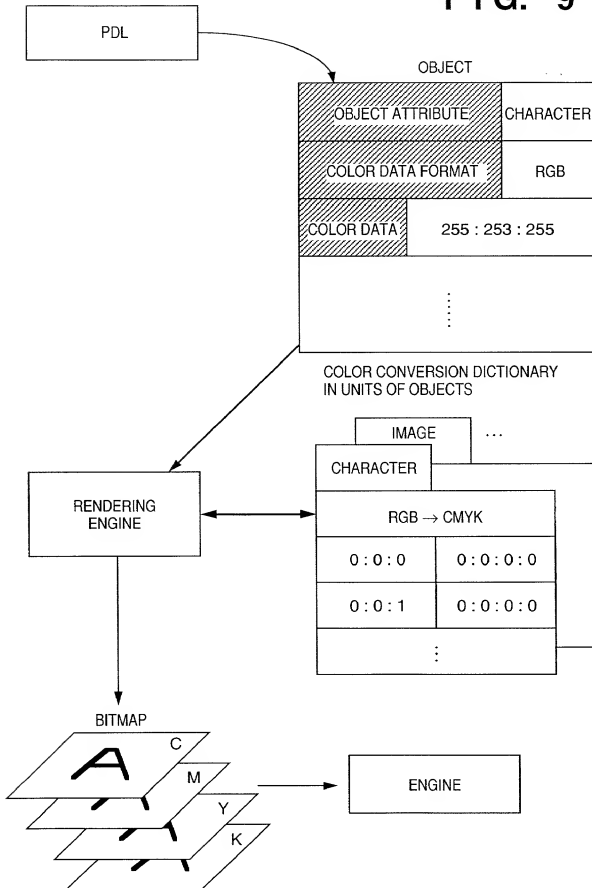

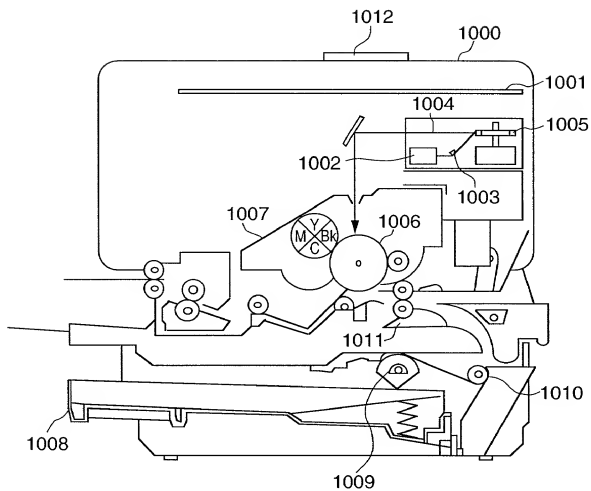**FIG. 10**

12/27

**FIG. 11**

1000

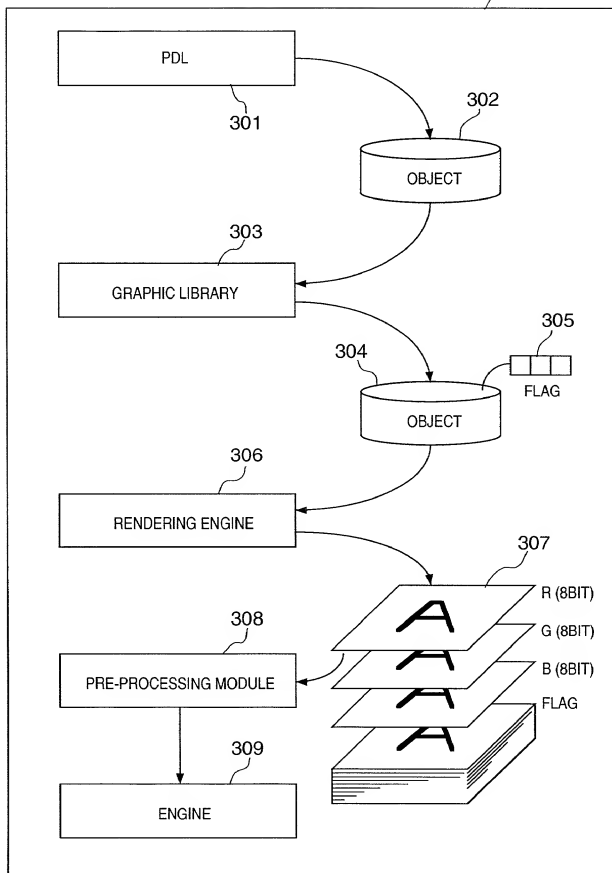


FIG. 12

| 0 (BITMAP FLAG) | 1 (COLOR FLAG) | 2 (CHARACTER FLAG)       |
|-----------------|----------------|--------------------------|
| 0 (BITMAP)      | 0 (COLOR)      | 0 (OTHER THAN CHARACTER) |
| 1 (VECTOR)      | 1 (MONOCHROME) | 1 (CHARACTER)            |
|                 |                | 0 (TONE PRIORITY)        |
|                 |                | 1 (RESOLUTION PRIORITY)  |

BITMAP FLAG = 0

BITMAP FLAG = 1

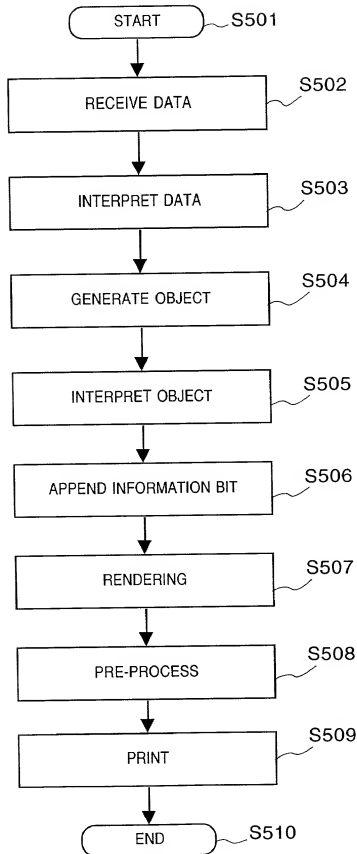
**FIG. 13**

FIG. 14

1000

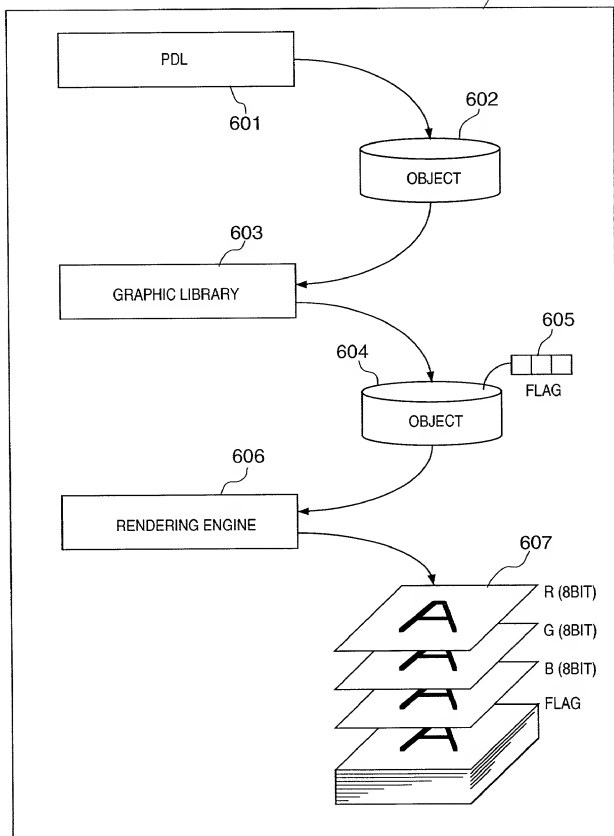


FIG. 15

|                 |                |                          |                   |
|-----------------|----------------|--------------------------|-------------------|
| 0 (BITMAP FLAG) | 1 (COLOR FLAG) | 2 (CHARACTER FLAG)       | } BITMAP FLAG = 0 |
| 0 (BITMAP)      | 0 (COLOR)      | 0 (OTHER THAN CHARACTER) |                   |
| 1 (VECTOR)      | 1 (MONOCHROME) | 1 (CHARACTER)            | } BITMAP FLAG = 1 |
|                 |                | 0 (TONE PRIORITY)        |                   |
|                 |                | 1 (RESOLUTION PRIORITY)  |                   |


16/27

FIG. 16

|                       |         |         |                        |
|-----------------------|---------|---------|------------------------|
| SYNTHESIZED OBJECT    | S NOT S | D NOT D | Sort SandD SxorD S α D |
| FLAG SYNTHESIS METHOD | S FLAG  | D FLAG  | AND                    |



FIG. 17

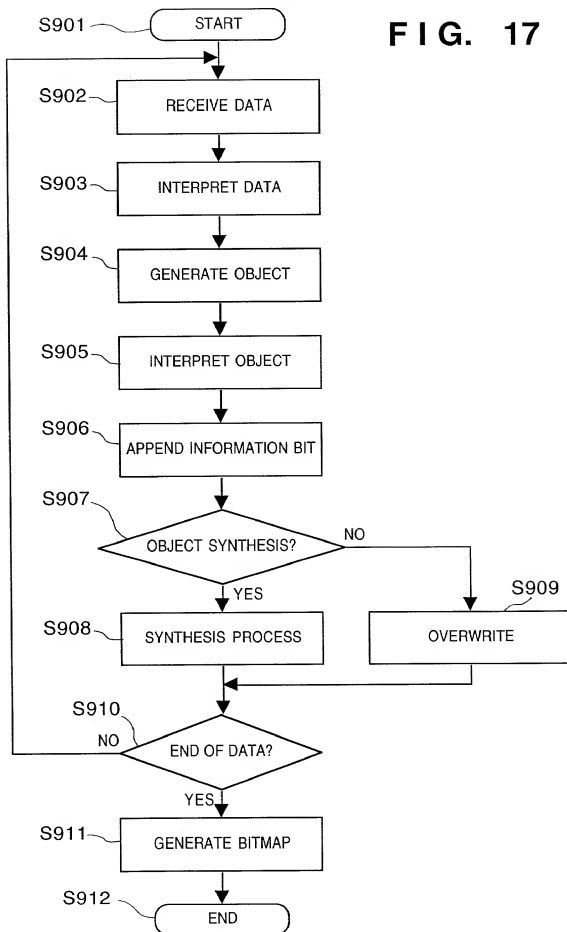

**FIG. 18**

|                       |         |         |                        |
|-----------------------|---------|---------|------------------------|
| SYNTHESIZED OBJECT    | S NOT S | D NOT D | SorD SandD SxorD S α D |
| FLAG SYNTHESIS METHOD | S FLAG  | D FLAG  | ALL '0'S               |

FIG. 19

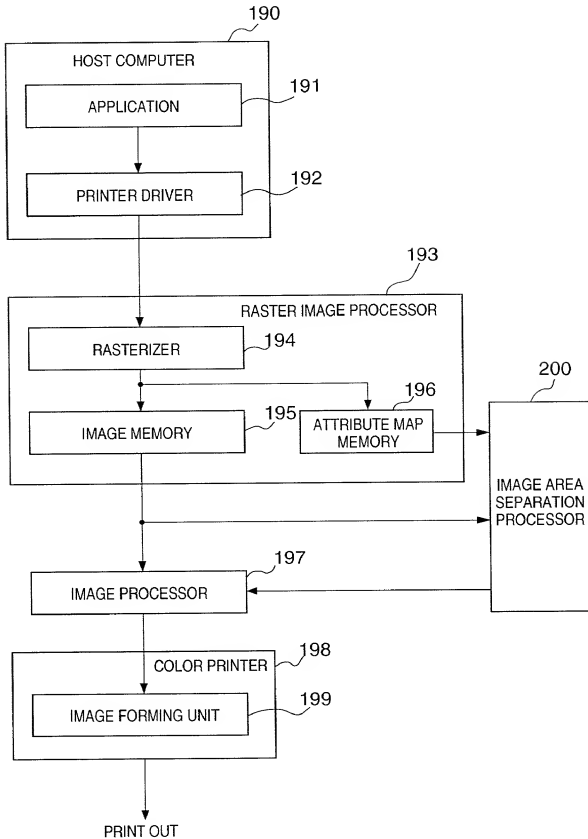
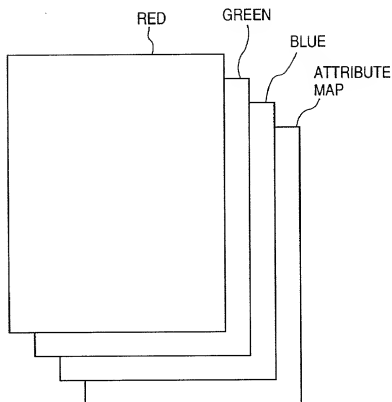
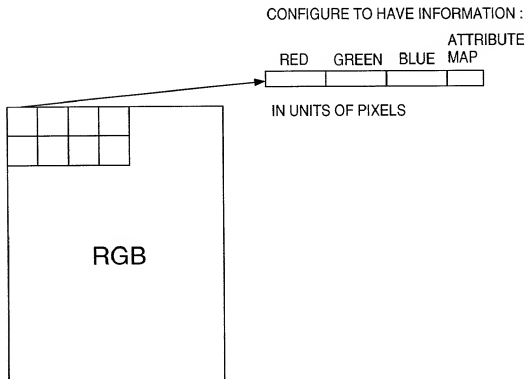


FIG. 20

|             |  |             |        |
|-------------|--|-------------|--------|
| BIT         |  | 0           |        |
| INFORMATION |  | BITMAP FLAG |        |
|             |  | 0           | VECTOR |
|             |  | 1           | BITMAP |

FIG. 21

|   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 |
| 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

**FIG. 22****FIG. 23**

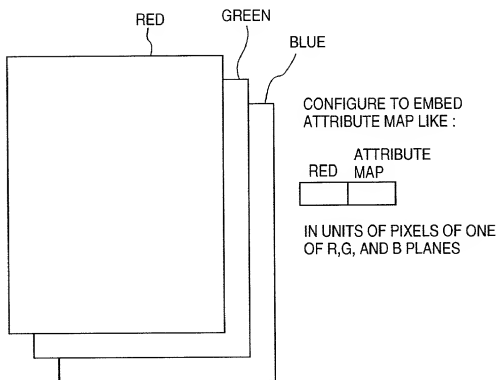
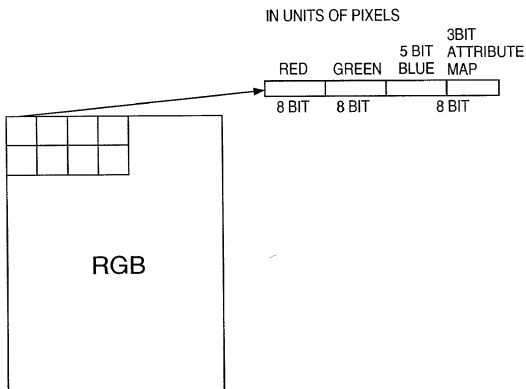
**FIG. 24****FIG. 25**

FIG. 26


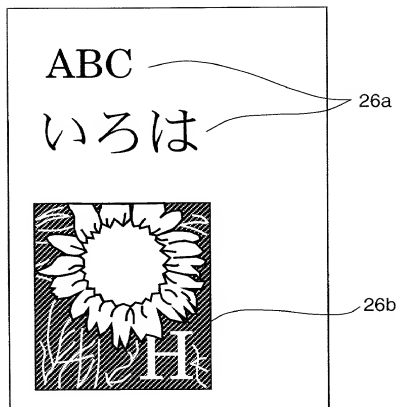
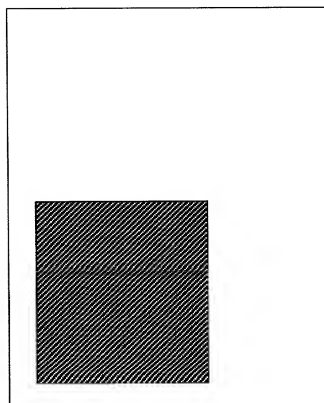


FIG. 27

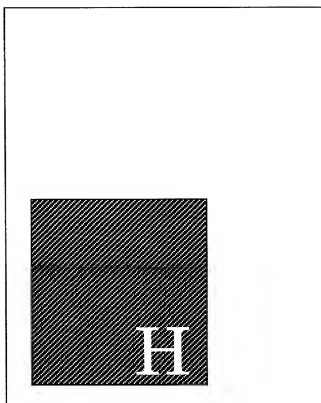

**FIG. 28**

|     |     |     |
|-----|-----|-----|
| 25  | 50  | 125 |
| 100 | 75  | 150 |
| 225 | 200 | 175 |

**FIG. 29**



**FIG. 30**

|     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 254 | 148 | 152 | 156 | 160 | 164 | 168 | 172 |
| 252 | 144 | 68  | 72  | 76  | 80  | 84  | 176 |
| 248 | 140 | 64  | 20  | 24  | 28  | 88  | 180 |
| 244 | 136 | 60  | 16  | 4   | 32  | 92  | 184 |
| 240 | 132 | 56  | 12  | 8   | 36  | 96  | 188 |
| 236 | 128 | 52  | 48  | 44  | 40  | 100 | 192 |
| 232 | 124 | 120 | 116 | 112 | 108 | 104 | 196 |
| 228 | 224 | 220 | 216 | 212 | 208 | 204 | 200 |


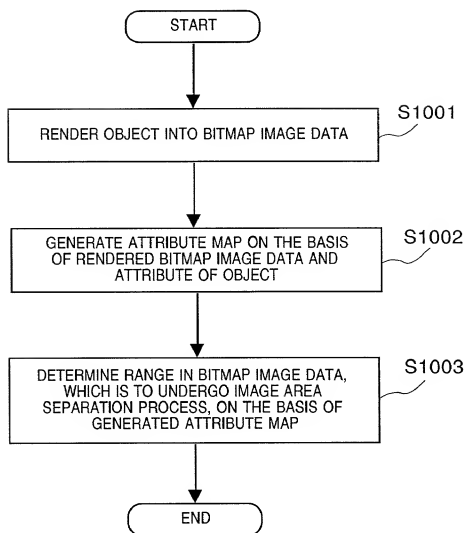
**FIG. 31**

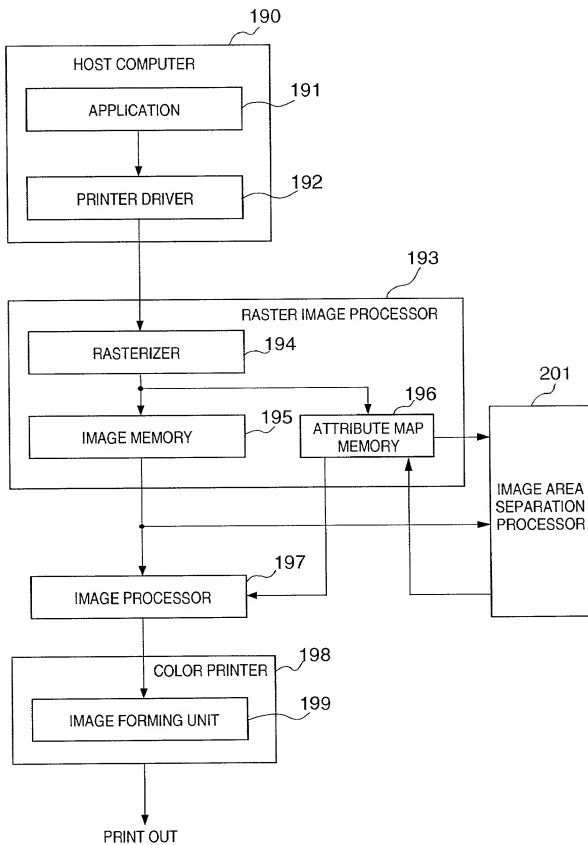FIG. 32



**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**  
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE PROCESSING APPARATUS AND METHOD, AND STORAGE  
MEDIUM

the specification of which [X] is attached hereto. [ ] was filed on \_\_\_\_\_

as United States Application No. or PCT International Application No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

|                |                        |                            | (Yes/No)                |
|----------------|------------------------|----------------------------|-------------------------|
| <u>Country</u> | <u>Application No.</u> | <u>Filed (Day/Mo./Yr.)</u> | <u>Priority Claimed</u> |
| JAPAN          | 11-062426              | 09/03/1999                 | Yes                     |
| JAPAN          | 11-217852              | 30/07/1999                 | Yes                     |
| JAPAN          | 11-373848              | 28/12/1999                 | Yes                     |

I hereby appoint the practitioners associated with the firm and customer number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO**  
**Customer Number: 05514**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

006000 0521850 030900

Full Name of Sole or First Inventor Ken-ichi OHTA  
 Inventor's signature Ken-ichi Ohta  
 Date February 29, 2000 Citizen/Subject of Japan  
 Residence 54-50, Shibokuchi, Takatsu-ku, Kawasaki-shi,  
Kanagawa-ken, Japan  
 Post Office Address c/o CANON KABUSHIKI KAISHA,  
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any Shigeo YAMAGATA  
 Second Inventor's signature Shigeo Yamagata  
 Date February 29, 2000 Citizen/Subject of Japan  
 Residence 103-1-314, Kozukuecho, Kohoku-ku,  
Yokohama-shi, Kanagawa-ken, Japan  
 Post Office Address c/o CANON KABUSHIKI KAISHA,  
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Third Joint Inventor, if any Takuto HARADA  
 Third Inventor's signature Takuto Harada  
 Date March 2, 2000 Citizen/Subject of Japan  
 Residence 22-4, Kaminomiya 1-chome, Tsurumi-ku,  
Yokohama-shi, Kanagawa-ken, Japan  
 Post Office Address c/o CANON KABUSHIKI KAISHA,  
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Fourth Joint Inventor, if any Atsushi MATSUMOTO  
 Fourth Inventor's signature Atsushi Matsumoto  
 Date March 1, 2000 Citizen/Subject of Japan  
 Residence 6-22-203, Nishikicho 2-chome, Tachikawa-shi,  
Tokyo, Japan  
 Post Office Address c/o CANON KABUSHIKI KAISHA,  
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Fifth Joint Inventor, if any \_\_\_\_\_  
 Fifth Inventor's signature \_\_\_\_\_  
 Date \_\_\_\_\_ Citizen/Subject of \_\_\_\_\_  
 Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full Name of Sixth Joint Inventor, if any \_\_\_\_\_  
 Sixth Inventor's signature \_\_\_\_\_  
 Date \_\_\_\_\_ Citizen/Subject of \_\_\_\_\_  
 Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

F511/A601948/ald

00521850 030900